


PRODUCT DATA SHEET

AUTOMATIC WATER CONDITIONING SYSTEMS

HIGH FLOW MULTI TANK COMMERCIAL 2900 SERIES SYSTEMS

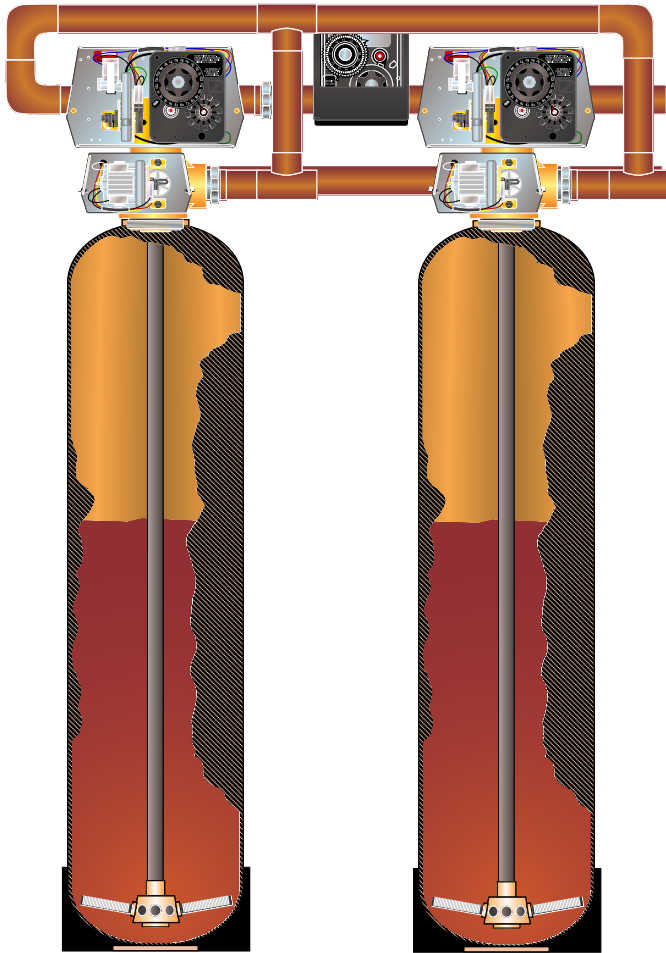

Duplex Configuration

Standard Features:

- 2" Female Connections
- Fleck 2900 Control Valve
- Lead-Free Brass Valve
- Motor-Driven Piston-Operated
- Premium Grade Softening Media
- Hard Water Lock-Out During Regeneration
- Fiberglass Tank
- Seamless Brine Tanks
- Safety Overflow System
- Dry Salt-Grid System

Optional Features:

- 1 1/2" Remote Meter - Metered Water Usage
- 2" Remote Meter - Metered Water Usage
- 3" Remote Meter - Metered Water Usage
- Alternating Tanks - System 7 Configuration
- Series Regeneration - System 6 Configuration
- Optional Pressure Gauges
- Optional Test Ports
- Optional Unions On Inlet & Outlet
- Choice of Brine Tanks (Shown Below)

Type	Dimensions	Salt Cap.	Notes on Brine Tanks
Commercial	24" x 50"	800 lb	Sizes 300 - 1000
Bulk	30" x 48"	1500 lbs	Sizes 1000 - 2000
Industrial	39" x 48"	2500 lbs	Sizes 1000 - 2000

PRODUCT SPECIFICATIONS

Model No.	Media Qty Cubic Feet	Grains of Capacity			Flow @ 15 psi drop	Flow @ 25 psi Drop	Media Tank Dia. x H	Max Drain Flow gpm	Distributor Type
		15 lbs/cu. ft.	10 lb /cu. ft.	5 lbs /cu.ft.					
300	3.0	90000	75000	60000	32 gpm	50 gpm	14" x 65"	4.0	Std
400	4.0	120000	100000	80000	42 gpm	55 gpm	16" x 65"	5.0	Std
500	5.0	150000	125000	100000	50 gpm	65 gpm	18" x 65"	7.0	Std
700	7.0	210000	175000	140000	60 gpm	85 gpm	22" x 60"	10.0	Hub & Lat
1000	10.0	300000	250000	200000	72 gpm	95 gpm	24" x 71"	12.0	Hub & Lat
1500	15.0	450000	375000	300000	80 gpm	110 gpm	30" x 72"	20.0	Hub & Lat
2000*	20.0	600000	500000	400000	94 gpm	125 gpm	36" x 72"	25.0	Hub & Lat

System 6 Series Configuration will (2x) flow rate during the service cycle, only (1x) flow rate in regeneration. Triplex would (3x) flow during service and approximately (2x) during regeneration. System 7 Alternating Configuration will provide a single tank flow rate in a duplex version and (2x) flow rate in a triplex version.

Flow Rates are calculated and may vary with specific conditions such as temperature and pressure.

Exchange capacity based on treating water with 10 grains per gallon total hardness @ 10 gpm per cu ft and free of color, odor, and turbidity.

* Minimum salt dosage is 6 lbs. per cu. ft.

ADDITIONAL OPERATING INFORMATION

Not intended to be used to treat water that is Micro biologically unsafe or of unknown quality. Installation must comply with all state and local codes. Tank dimensions are based on fiberglass only. Steel tank dimensions may vary.

Operating Water Temperature Range
 Operating Ambient Temperature Range
 Operating Pressure Range
 UL approved electrical components

Max 100°
 Max 120°
 Max 125 psi
 Minimum 35°
 Minimum 35°
 Minimum 20 psi
 110v - 60 hz



Aqua Systems Dealer Services • 114 Vista Parkway • Avon, Indiana 46123
 1-317-272-6721 • 1-800-272-5511 • Fax 1-800-272-3255