

# GRAVEL UNDERBEDDING AND MEDIA INSTALLATION


SYSTEM MODEL NUMBER: \_\_\_\_\_

TANK DIMENSIONS: \_\_\_\_\_

UNDERBEDDING/TANK: \_\_\_\_\_

MEDIA/TANK: \_\_\_\_\_

1. PLACE MEDIA TANK IN INSTALLATION AREA.
2. TAPE OR PLUG TOP OF DISTRIBUTOR RISER.
3. FILL TANK WITH 12" - 14" OF WATER.
4. USING A FUNNEL POUR IN GRAVEL UNDERBEDDING. \*
5. MAKE SURE GRAVEL IS LEVEL AS POSSIBLE
6. POUR IN SOFTENER MEDIA.\*
7. REMOVE TAPE FROM RISER AND CLEAN TO REMOVE RESIDUE.
8. APPLY SILICON TO RISER AND VALVE O-RINGS. (INTERIOR AND EXTERIOR)
9. INSTALL CONTROL VALVE ON THE MINERAL TANK. \*\*
10. ADJUST MEDIA TANK TO ALIGN PLUMBING WITH THE CONTROL VALVE.

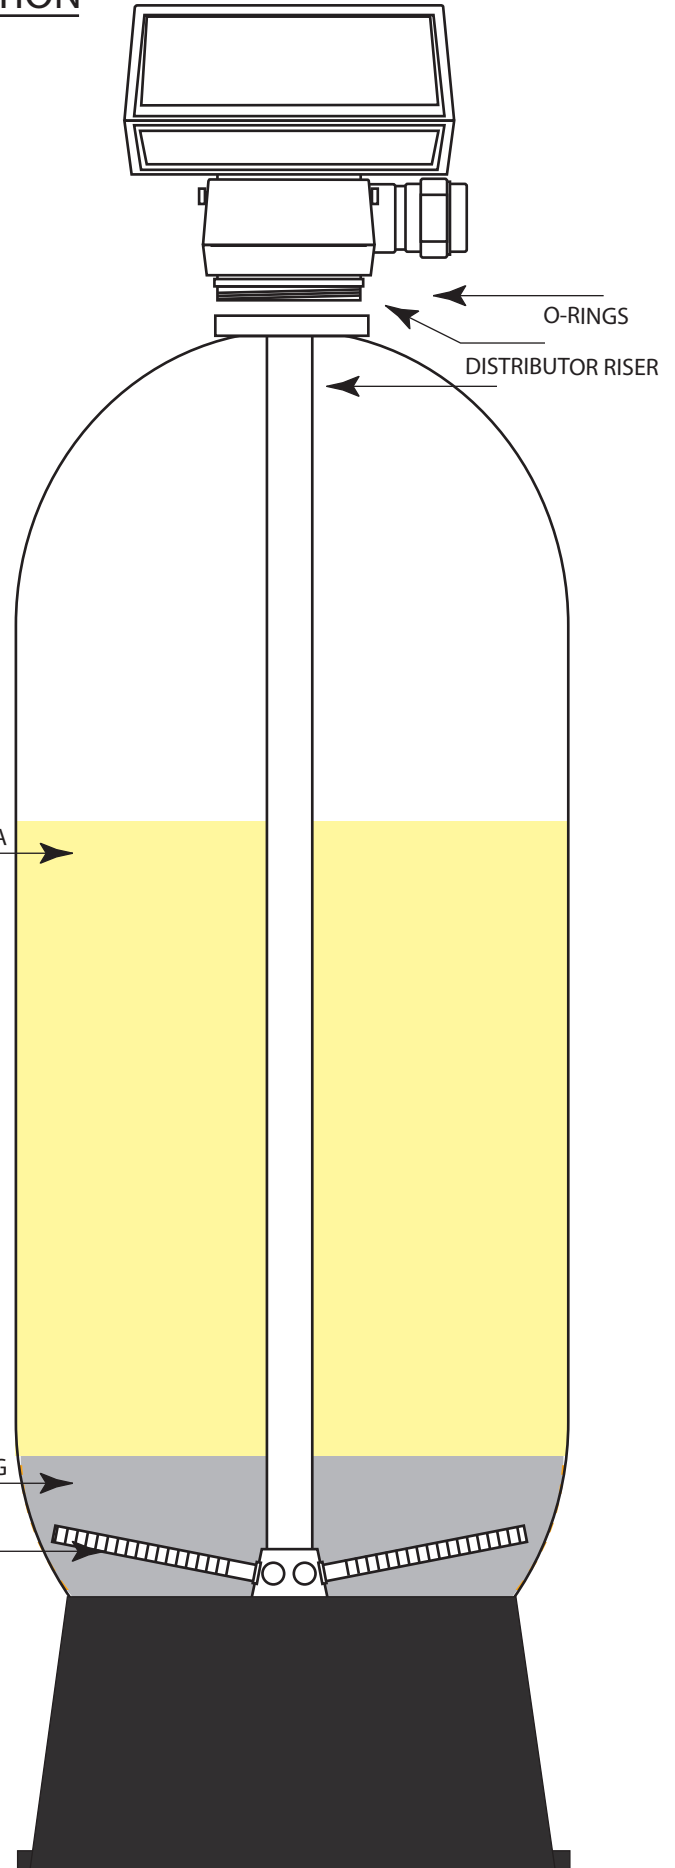

BEFORE FILLING, MAKE SURE THE LATERALS ARE INTACT AND SECURE TO THE HUB!

\*PERIODICALLY VERIFY POSITION OF DISTRIBUTOR, SHOULD BE CENTERED.

\*\*THREADED VALVES MAY CROSS THREAD TANK CAUTION ADVISED.

REPLACEMENT OF TANK WOULD BE NECESSARY.

-IF THE TANK USES A FLANGE, THREAD ADAPTER TO VALVE AND SECURE TO FLANGE ON TANK WITH SUPPLIED BOLTS.