

GRAVEL UNDERBEDDING AND MEDIA INSTALLATION


SYSTEM MODEL NUMBER: _____

TANK DIMENSIONS: _____

UNDERBEDDING/TANK: _____

MEDIA/TANK: _____

1. PLACE MEDIA TANK IN INSTALLATION AREA.
2. TAPE OR PLUG TOP OF DISTRIBUTOR RISER AND MAKE SURE ITS CENTERED IN TANK.
3. FILL TANK WITH 12" - 14" OF WATER.
4. USING FUNNEL INSTALL GRAVEL UNDERBEDDING.*
5. INSTALL SOFTENER MEDIA.*
6. REMOVE TAPE FROM RISER AND CLEAN TO REMOVE RESIDUE.
7. APPLY SILICONE LUBE TO RISER AND VALVE O-RINGS. (INTERIOR AND EXTERIOR)
8. INSTALL CONTROL VALVE ON THE MINERAL TANK.**
9. ADJUST MEDIA TANK TO ALIGN PLUMBING WITH THE CONTROL VALVE.

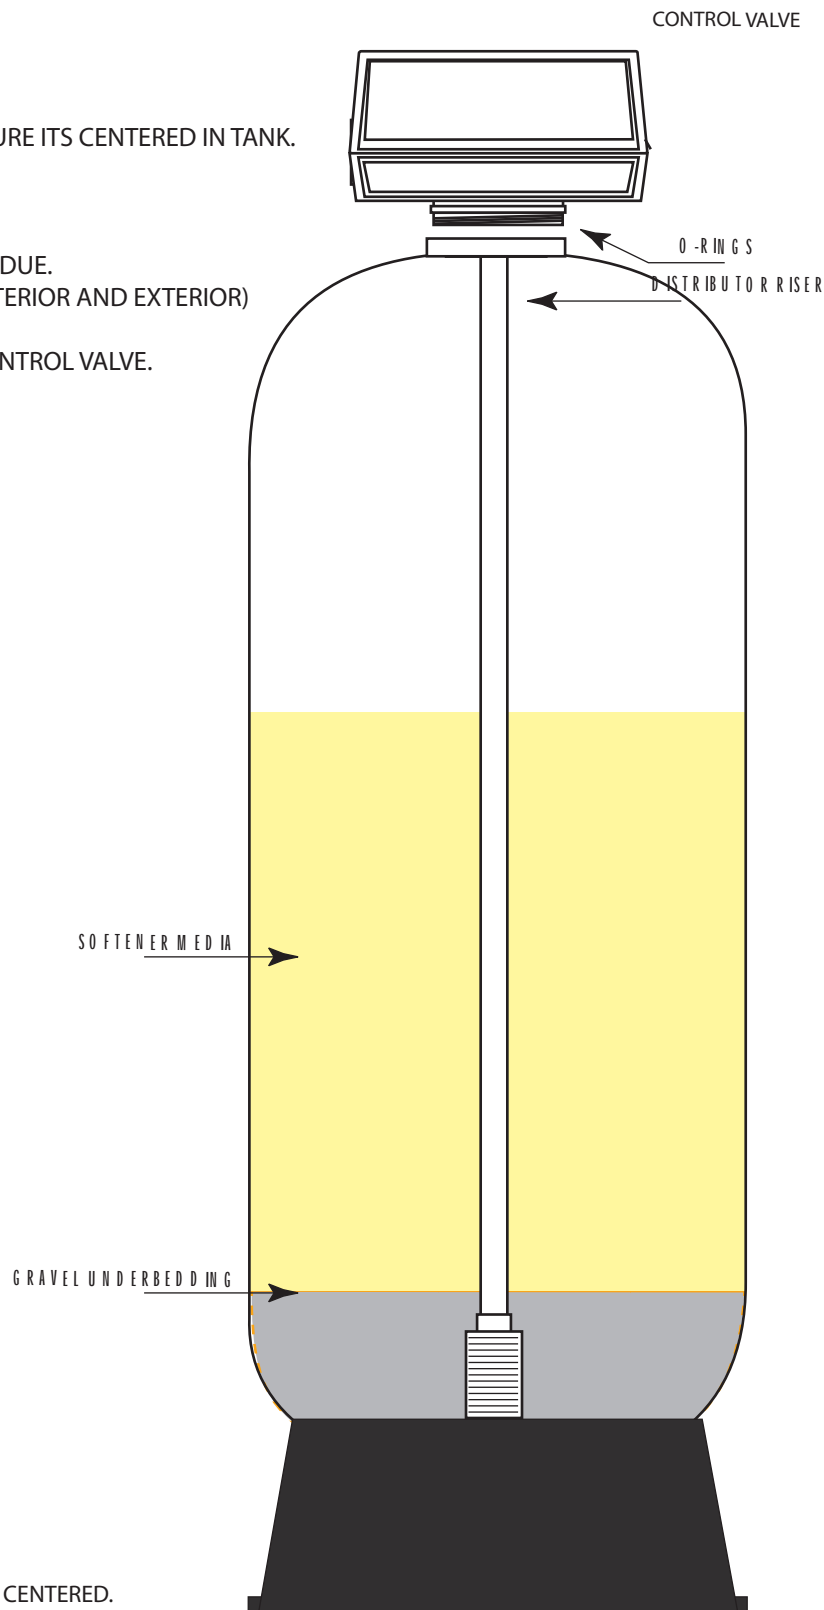

*PERIODICALLY VERIFY POSITION OF DISTRIBUTOR, SHOULD BE CENTERED.

**THREADED VALVES MAY CROSS THREAD TANK CAUTION ADVISED.
REPLACEMENT OF TANK WOULD BE NECESSARY.